CSV310I

Slimline video cable - Ultra high-speed HDMI 2.1 - HDMI A male - HDMI A male - HighFlex™

Highlights:

- HDMI 2.1 full compliant
- Supports 8K @ 60Hz 4:4:4
- From 26 AWG down to 35 AWG
- 48 Gbps data rated
- Semi-Lock™ feature with higher withdrawal force
- Ø 5.5 mm (min.) outer jacket
- Slim connector design
- Sustainable TPE outer-jacket material



Product information:


The CSV310I series are fully compliant HDMI 2.1 cables, available in lengths from 0.5 m up to 10 m. They are specifically designed for reliable interconnections in professional installations and applications. Fully featured HDMI 2.1 construction, capable of handling a bandwidth up to 48 Gbps and resolutions up to 8K @ 60 Hz 4:4:4 makes it the perfect cable for the most demanding and future proof applications. . The Semi-Lock™ connector with gold plated contacts design guarantees reliability in all kinds of environments.



Certification:

HDMI ULTRA HIGH SPEED

Properties:

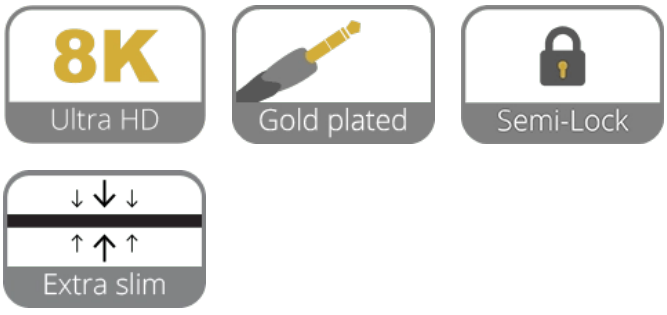

We reserve the right to change specifications without notice, this is part of our policy to continually improve our products.

Product Features:

Application	AV & IT
Series	Connect Series

Physical Characteristics:

Outer jacket	Material	TPE (≤ 2 m) 5.5 mm (Ø)
		TPE (≤ 3 m) 6.0 mm (Ø)
		TPE (≤ 5 m) 7.3 mm (Ø)
		TPE (≤ 10 m) 8.0 mm (Ø)
	Colours	Black
Inner conductor	American Wire Gauge	32 AWG (≤ 2 m)
		30 AWG (3 m)
		28 AWG (≤ 7.5 m)
		26 AWG (10 m)

Variants:

- CSV310IB/0.5 - Black 'improved' version - 0.5 meter
- CSV310IB/1 - Black 'improved' version - 1 meter
- CSV310IB/1.5 - Black 'improved' version - 1.5 meter
- CSV310IB/2 - Black 'improved' version - 2 meter
- CSV310IB/3 - Black 'improved' version - 3 meter
- CSV310IB/5 - Black 'improved' version - 5 meter
- CSV310IB/7.5 - Black 'improved' version - 7.5 meter
- CSV310IB/10 - Black 'improved' version - 10 meter

We reserve the right to change specifications without notice, this is part of our policy to continually improve our products.