HDM26


HDMI cable - High speed with ethernet - 0,125 mm² - 26 AWG

Highlights:

- Triple shielding

Product information:

100 meter reel of 26 AWG-size High quality HDMI cable. If, installed correctly this cable can reach high speeds that live up to the highest HDMI standards. This cable is designed for installation using the PROCAB Contractor Series equipment. Lengths below 8m will perform as HIGH SPEED HDMI with ETHERNET Lengths from 8m until 12m will perform at STANDARD SPEED HDMI with ETHERNET standards. Recommended HD distance : 20 m

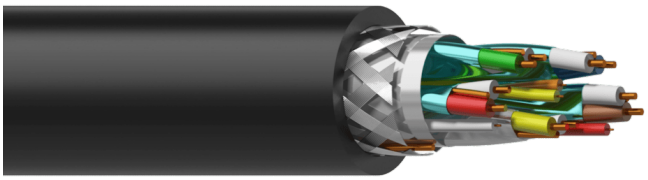

Certification:

Properties:



Inner Conductors:





Shielding:







Product Features:

Application	AV & IT
Series	Bulk & Accessories

We reserve the right to change specifications without notice, this is part of our policy to continually improve our products.

Physical Characteristics:

Inner conductor	Insulation	Material	FM-PE 1.1 mm (Ø) (5 pair)
			HD-PE 0.9 mm (Ø) (1 pair)
			HD-PE 0.9 mm (Ø) (2 cond.)
	Shielding	Aluminium foil	Al-mylar, 100% coverage - 25% Overlap
		Drain wire	BC 1 x 0.404 mm (Ø) (OFC)
Overall shielding	Aluminium foil		Al-mylar, 100% coverage - 25% Overlap
	Drain wire		BC 1 x 0.404 mm (Ø) (OFC)
	Braiding		AL-MG 16 x 12 x 0.12 mm (Ø)
Outer jacket	Material		PVC 8 mm (Ø)
	Colours		Black
Inner conductor	Material		BC 1 x 0.404 mm (Ø) (OFC) (5 pair)
			TC 7 x 0.16 mm (Ø) (OFC) (1 pair)
	American Wire Gauge		26 AWG (5 pair)
			26 AWG (1 pair)
			26 AWG (2 cond.)

Mechanical Characteristics:

Temperature range	Fixed installation	- 40 °C till + 80 °C
	Mobile installation	- 15 °C till + 60 °C
Bending radius	Fixed installation	6 x outer diameter
	Mobile installation	8 x outer diameter

We reserve the right to change specifications without notice, this is part of our policy to continually improve our products.