LS425


Loudspeaker cable - 4 x 2.5 mm² - 13 AWG

Highlights:

- 13 AWG thin and dense stranded conductors
- Flexible PVC jacket
- 4 conductors for 2-channel loudspeaker connection

Product information:

The LS 4-core series cables are high quality and flexible multi-core loudspeaker cables. This kind of double isolated speaker cable is suitable for use in indoor and outdoor applications. Each conductor is fitted with a highly flexible jacket made of PVC. The four conductors are twisted with two cotton cords, which ensures the great strength and flexibility of the cable. The four wires, together with the cords, are packed with a paper foil and a general PVC jacket.

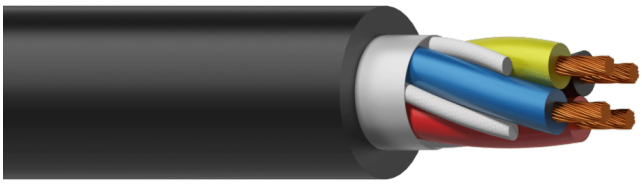

Inner Conductors:

STRANDED OXYGEN FREE COPPER

Product Features:

Application	AV & IT
	Rental & MI
Series	Bulk & Accessories

We reserve the right to change specifications without notice, this is part of our policy to continually improve our products.

Physical Characteristics:

Type of cable			4-core loudspeaker cable
Inner conductor	Material		BC 224 x 0.12 mm (Ø) (OFC)
	Section		0.0039 “²
	Insulation	Material	PVC 3.2 mm (Ø)
		Colours	Black / Red / Blue / Yellow
	Number of conductors		4
Filling			Cotton Yarn
Separator			Cotton paper
Inner conductor	American Wire Gauge		13 AWG
Outer jacket	Material		Flexible PVC 12 mm (Ø)
	Colours		Black
Inner conductor	Conductor twisting		Yes


Mechanical Characteristics:

Temperature range	Fixed installation	- 40 °C till + 80 °C
	Mobile installation	- 25 °C till + 70 °C
Bending radius	Fixed installation	8 x outer diameter
	Mobile installation	10 x outer diameter

Electrical Characteristics:

Lead resistance	0.66 Ω / 100 m
Cable Crosstalk	Min. 64 dB / 100 m

Cross sections:



We reserve the right to change specifications without notice, this is part of our policy to continually improve our products.